

DS-7608NI-L1/W Wi-Fi NVR




- 11.6-inch LCD display and HDMI output
- Up to 4-ch@4 MP (15 fps)/4-ch@1080p (30 fps) decoding capability
- H.265+/H.265/H.264+/H.264 video compression
- Up to 8-ch network camera inputs, connectable with Wi-Fi cameras
- Standing or wall-mounted installation




▪ Specification

Video and Audio	
IP Video Input	8-ch
HDMI Output	1-ch, 1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz
LCD Output	11.6-inch LCD, 1366 × 768
Incoming Bandwidth	60 Mbps
Outgoing Bandwidth	60 Mbps
Audio Output	1-ch, 3.5 mm connector 1-ch, built-in speaker
Two-Way Audio	1-ch, 3.5 mm connector
Decoding	
Stream Type	Video, Video & Audio
Decoding Format	H.265+/H.265/H.264+/H.264
Decoding Capability	4-ch@4 MP (15 fps), 4-ch@1080p (30 fps)
Synchronous playback	4-ch
Recording Resolution	6 MP/5 MP/4 MP/3 MP/1080p/UXGA /720p/VGA/4CIF/DCIF/ 2CIF/CIF/QCIF
Network	
Remote Connection	16
Network Protocol	TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS
Network Interface	1, RJ-45 10/100 Mbps self-adaptive Ethernet interface
Wireless Parameter	
Frequency Band	2.4 GHz
Antenna Structure	2 × 2MIMO
Transmission Speed	300 Mbps
Transmission Standard	IEEE 802.11b/g/n
Auxiliary Interface	
SATA	1
Capacity	Up to 6 TB capacity
USB Interface	2 × USB 2.0
General	
Power Supply	12 VDC, 1.5 A
Consumption	≤ 10 W (without HDD)
Working Temperature	0 °C to 40 °C (32 °F to 104 °F)
Working Humidity	10 to 90 %
Dimension (W × D × H)	300 x 230 x 46.3 mm (11.8" × 9.0" × 1.8")
Weight	≤ 1 kg (without HDD, 2.2 lb.)
Certification	
FCC	Part 15 Subpart B, ANSI C63.4-2014
CE	EN50130-4, EN 61000-3-2,EN 61000-3-3

▪ Dimension

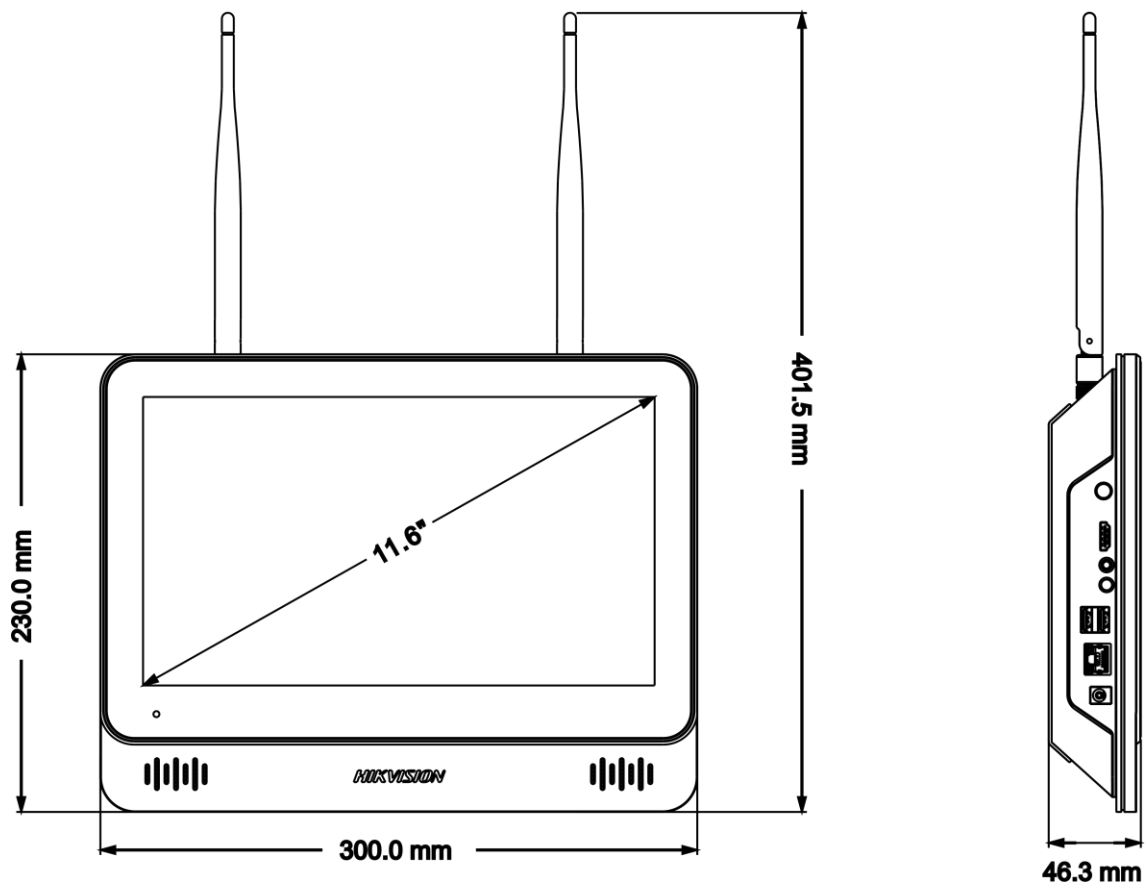

Physical Interface

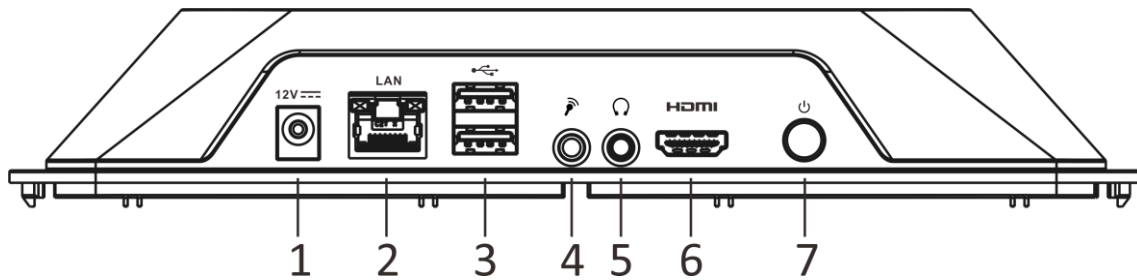

No.	Description	No.	Description
1	Power Supply	5	Audio Out
2	LAN Interface	6	HDMI Interface
3	USB Interface	7	Power Button/Screen Button
4	Two-Way Audio		

Available Model

DS-7608NI-L1/W

Distributed by



HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com